




LED Operating Light

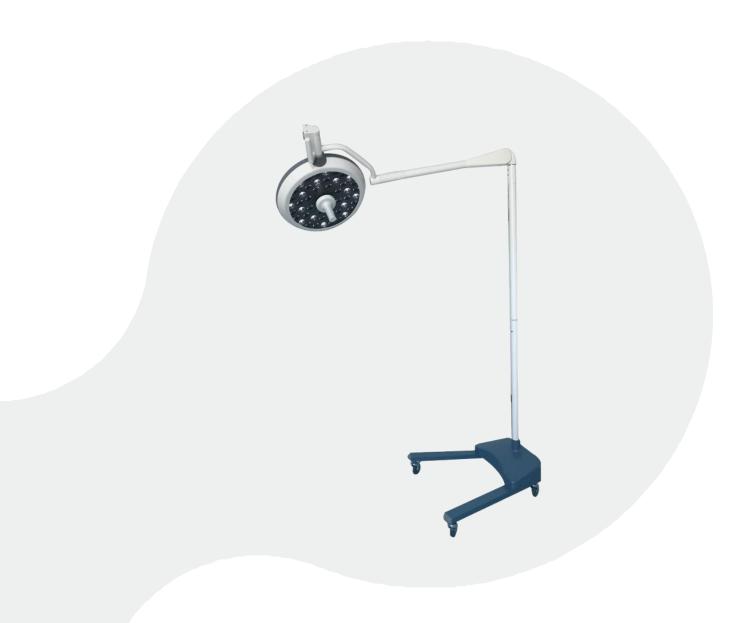

ADD: NO. 33 FUQING RD, QINGCUN TOWN, FENGXIAN DISTRICT, SHANGHAI, CHINA

TEL: +86-21-3752 7177 FAX:+86-21-5756 9916 Whatsapp:+86-132 4813 0102 URL: www.wesurglighting.com



上海卫远医疗器械有限公司

SHANGHAI WEYUAN MEDICAL DEVICE CO., LTD

User-friendly and Best Value for Money





Full-close streamline lamp body assures visual comfort and suitable for laminar flows.



Delivery up to 160, 000 lux of pure, white bright light; Illumination depth reach 1000mm.



LED Operating Light

Premium Quality, Surprising Price

Individual adjustment system for illumination intensity and color temperature. 0-100% continuous adjustment. Endo model.



Focus field adjusted by clockwise or anti-clockwise the detached central handle.



Caster with brakes, more steady and easy to move.

Optional lithium backup battery, small volume and lightweight

ADD: NO. 33 FUQING RD, QINGCUN TOWN, FENGXIAN DISTRICT, SHANGHAI, CHINA

TEL: +86-21-3752 7177 FAX:+86-21-5756 9916 Whatsapp:+86-132 4813 0102 URL: www.wesurglighting.com


上海卫远医疗器械有限公司 SHANGHAI WEYUAN MEDICAL DEVICE CO., LTD

LED Operating Light

WYLEDM Series lighting are significantly brighter, whiter and cooler than any previous technology. So you get the accurate colors with remarkable shadow control and virtually no heat emission which make our lights more comfortable to work than other lights.

General Features

- Excellent cold light and perfect shadowless feature ensure the surgical lighting safety
- No visual fatigue even if long time surgery
- ➤ Ultra-high color rendering and ultra-low irradiance
- Excellent lighting depth and shadowless effect
- Focus field adjusted by clockwise or anti-clockwise the central handle
- Step-less adjustment of illumination and spot field
- High-effective and energy-saving solution
- More than 50,000 hours effective life-time, extremely reduce the hospital's maintenance cost



Technical Specifications

Diagram of control panel

Model No.	WYLEDL700	WYLEDL500
Illumination intensity	40,000-160,000Lux	40,000-160,000Lux
Color temperature	4000-5000k	4000-5000k
Color rendering index	≥95Ra%	≥95Ra%
Light field size	120-250mm	120-250mm
Illumination depth	1000mm	1000mm
Light source	Osram LED lighting	Osram LED lighting
Qty of LEDs	80	48
Diameter of lamp head	700	500
Optional	HD video camera system, lithium battery	HD video camera system, lithium battery

ADD: NO. 33 FUQING RD, QINGCUN TOWN, FENGXIAN DISTRICT, SHANGHAI, CHINA

TEL: +86-21-3752 7177 FAX:+86-21-5756 9916 Whatsapp:+86-132 4813 0102 URL: www.wesurglighting.com